




AGRICULTURAL LINE

TE/CL

FLAIL MOWERS FOR GRASS AND BRANCHES

FOR MIDI-EXCAVATORS - NO DRAIN LINE REQUIRED

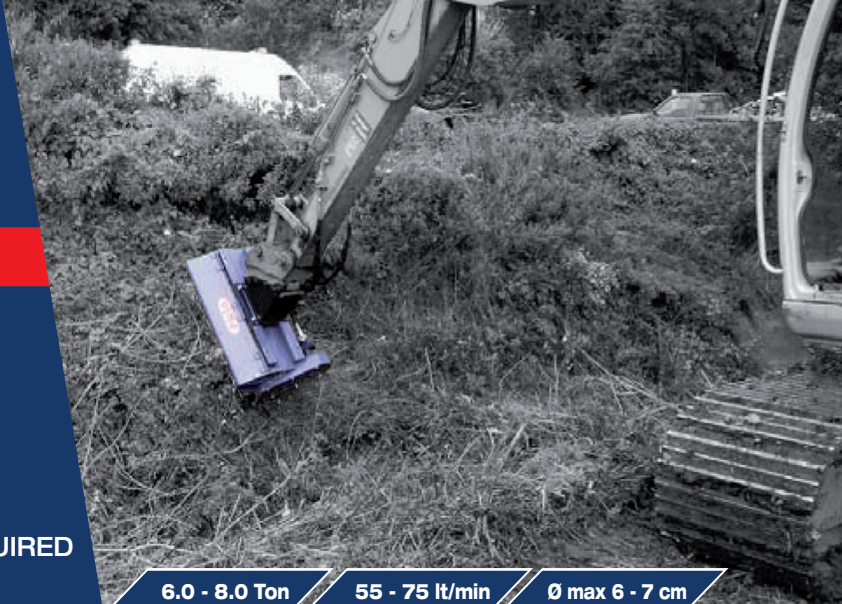

Flail mower head, for cutting grass, branches, bushes, dense vegetation, suitable to midi-excavators from 6,0 to 8,0 tons an power up to 70 hp. Max. cutting diameter 6-7 cm.

STANDARD EQUIPMENT:

The mower head is delivered with a steel plate unpainted for welding the hitch excavator bracket. The hydraulic motor is the Fixed piston version with size of 25cc or 34cc. Every hydraulic motor is equipped with a by-pass (anticavitation) valve. Pre-setted at factory according to the size piston motor fitted on. Every piston motor can be used without the drain port connection, but it must be specified at the order, if the excavator hasn't the drain line on it. Belt transmission with 3 XPB belts, rear adjustable roller, frontal protection with chains and rear protection with rubber.

Technical information

Model	Code	Cutting wide cm. 	Exterior width cm. 	Weight kg. 	Excavator weigh ton. 	Flow rate lt/min 	Pressure set bar 
TE/CL 100	63100	105	125	315	6.0 - 7.0	55-75	230
TE/CL 120	63120	125	140	345	7.0 - 8.0	55-75	230

Tools

	Multipurpose knives for grass and bushes. max size 3 cm. Cod. ZP 293016 Rotor A - standard - 20 - 24 kit (x2)		"Y" Knives for grass, bushes and branches. Diam.max 4 cm. Cod. ZP 293003 Rotor B - optional - 12 - 16 kit (x2)
	"Spatula" knives for grass and bushes. max size 3 cm. Cod. ZP 137001 Rotor I - optional - 20 - 24 pcs.		"Spatula" knives for grass and bushes. max size 5 cm. Cod. ZP 137001 Rotor C - optional - 20 - 24 pcs.

Optional

Floating linkage	Oil flow divider 3/4"	Excavator hitch bracket	DRAINLESS piston motor version
------------------	-----------------------	-------------------------	---------------------------------------