


TE/DP

FLAIL MOWERS FOR GRASS AND BRANCHES FOR MINI-EXCAVATORS

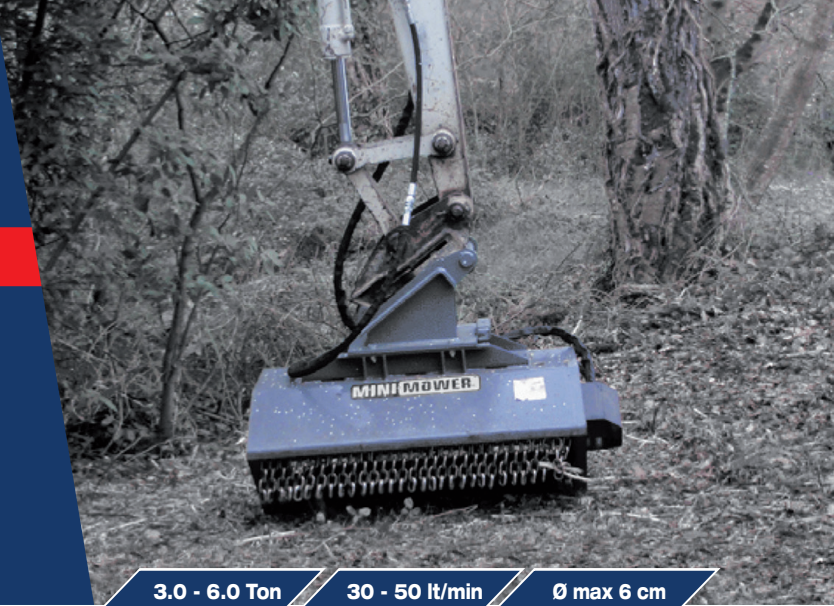

3.0 - 6.0 Ton	30 - 50 lt/min	Ø max 6 cm
----------------------	-----------------------	-------------------

Flail mower head ideal for cutting grass, small branches, bushes, suitable to mini-excavator from 3,0 to 6,0 ton. Max. cutting diameter 6cm.

STANDARD EQUIPMENT:

The mowers are delivered with a steel unpainted plate to build the hitch bracket excavator, it is equipped with drainless cast iron gear motor with by-pass integrated valve, fixed directly with the rotor, 140mm rear roller diam. Rotor can be equipped with different tools. TE-DPC is equipped with un-direct transmission with pulleys (NR. 2 Belts)

NOTE: Size motors available are 12 or 16cc for 80 and 100 DP, 22CC for 120DP, TE-DPC's are equipped with Piston motors on Belts transmission, 12cc or 20cc are the size available. No drain line is required even for the Piston motors.

Technical information

Model	Code	Cutting wide cm. 	Exterior width cm. 	Weight kg. 	Excavator weigh ton. 	Flow rate lt/min 	Pressure set bar 	Knifes nr.
TE/DP 80	62080	80	110	170	3.0 - 4.0	30-35	180	24
TE/DP 100	62100	100	130	195	4.0 - 5.0	40-45	180	32
TE/DP 120	62120	120	150	230	5.0 - 6.0	45-50	180	40
TE/DPC 80	62081	80	110	190	3.0 - 4.0	30-35	180	24
TE/DPC 100	62101	100	130	215	4.0 - 5.0	40-45	180	32

Tools

	Multipurpose knives for grass and bushes. max size 3 cm. Cod. ZP 293016 Rotor A - standard -		"Y" Knives for grass, bushes and branches. Diam.max 4 cm. Cod. ZP 293003 Rotor B - optional -
	"Spatula" knives for grass and bushes max size 3 cm. Cod. ZP 137001 Rotor I - optional -		"Spatula" Knives for grass and bushes max size 5 cm. Cod. ZP 137001 Rotor C - optional -

Optional

Floating linkage	Oil flow divider 1/2" for motors gr. 2
Oil flow divider 3/4" for motors gr. 3	Excavator hitch bracket